

VU-15 Flat Panel LCD Monitor

The VU-15 is a high resolution LCD flat panel monitor. It's a sturdy and versatile workhorse ideal for a number of applications, and a perfect match for any Dage-MTI camera. One look at the 1024 x 768 resolution picture and the VU-15 will become one of your favorites.



FEATURES


- 15" 4:3 LCD Monitor
- Brightness 350cd/m²
- Contrast 450:1
- Rack Mount Available
- Inputs Composite, S-Video, YPbPr , VGA, DVI
- 3D Comb Filter
- Dynamic Noise Reduction

SPECIFICATIONS

System	PAL, NTSC	
VGA	Display Panel	LCD
	Resolution	1024 X 768
	Brightness	350CD/m ²
	Contrast	450:1
	Response Time	8ms
	Viewing Angle	170°/150°
Video Input/Output	Composite Video Input	2 channels BNC input 1.0V p-p, 75Ω, 2 ch output
	S-Video	2 channel input (Y/C), 1 channel looping output
	DVI	2 channel input
	VGA	2 channel input
Audio	3 channel input, 2W, 3 channel output	
Menu	OSD	
Dimension	358 X300 X 68.5 (mm)	
Weight	4.5kg	
Power Source	Voltage	AC 100~230v 50~60Hz
	Power	MAX 32W
Operating Environment	Temperature: 0° C ~40° C; Operating Humidity:10%~85%	

VU-15 FLAT PANEL LCD MONITOR

FRONT PANEL CONTROLS

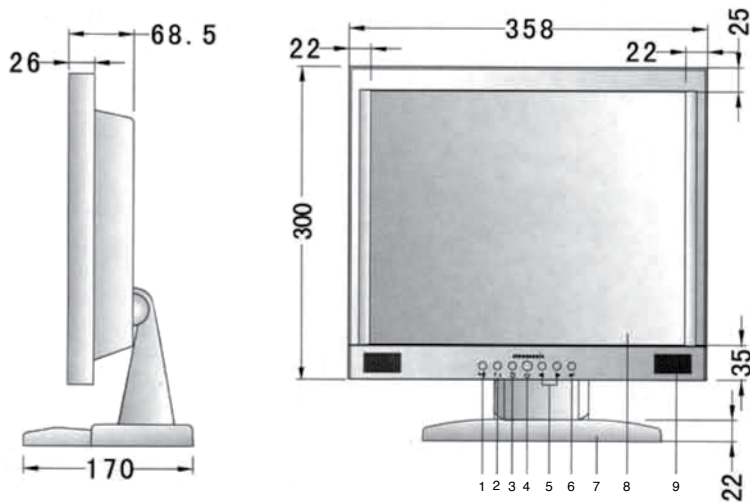

Profile

Front


1. Remote IR
2. Input select: AV1, AV2, S-Video, YPbPr, PC, and DVI
3. OSD On/Off
4. Power
5. a. OSD off: adjust volume (range 1-100)
b. OSD on: select forward/backward
c. Change current value or function of item selected
6. Select current item
7. Monitor bracket
8. Display panel
9. Speakers

REAR PANEL CONTROLS

10. RGB/YUV: YPbPr IN
(This monitor has YUV functionality.
RGB not available.)
11. VIDEO1: VIDEO IN/OUT
12. VIDEO 2: VIDEO 2 IN/OUT
13. SVHS: S-Video IN/OUT
14. AUDIO1: VIDEO 1, S-VIDEO
AUDIO IN/OUT
15. AUDIO2: VIDEO2, YPbPr
AUDIO IN/OUT
16. AUDIO3: VGA, DVI AUDIO IN/OUT
17. VGA: VGA IN
18. DVI: DVI IN
19. Power Switch



Profile

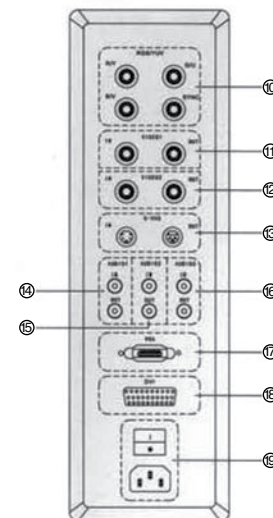

Dage-MTI (219) 872-5514

Call for additional product information or free product demos.

Visit online at www.dagemti.com.